




DV150 Flow Diverter

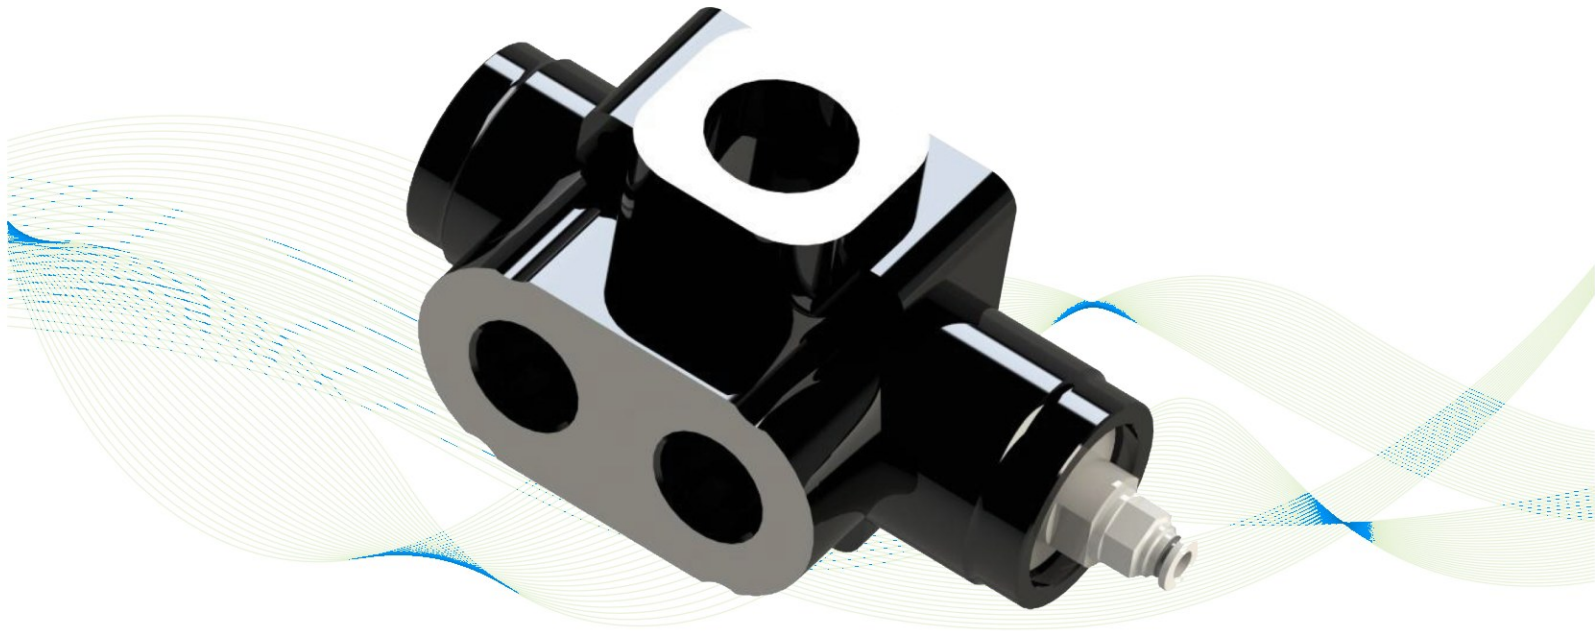


TECHNICAL DATA:

Flow	150L/min	Optimal viscosity range	12-100cSt
Max. working pressure	250bar	Oil filtering	25µm
Max. peak pressure	270bar	Air pressure	6-12bar
Oil temperature	-25°C—+80°C	Mounting position	Chassis

3 way valve with pneumatic shifting to operate from the cabin of the vehicle

DIMENSIONS(mm)

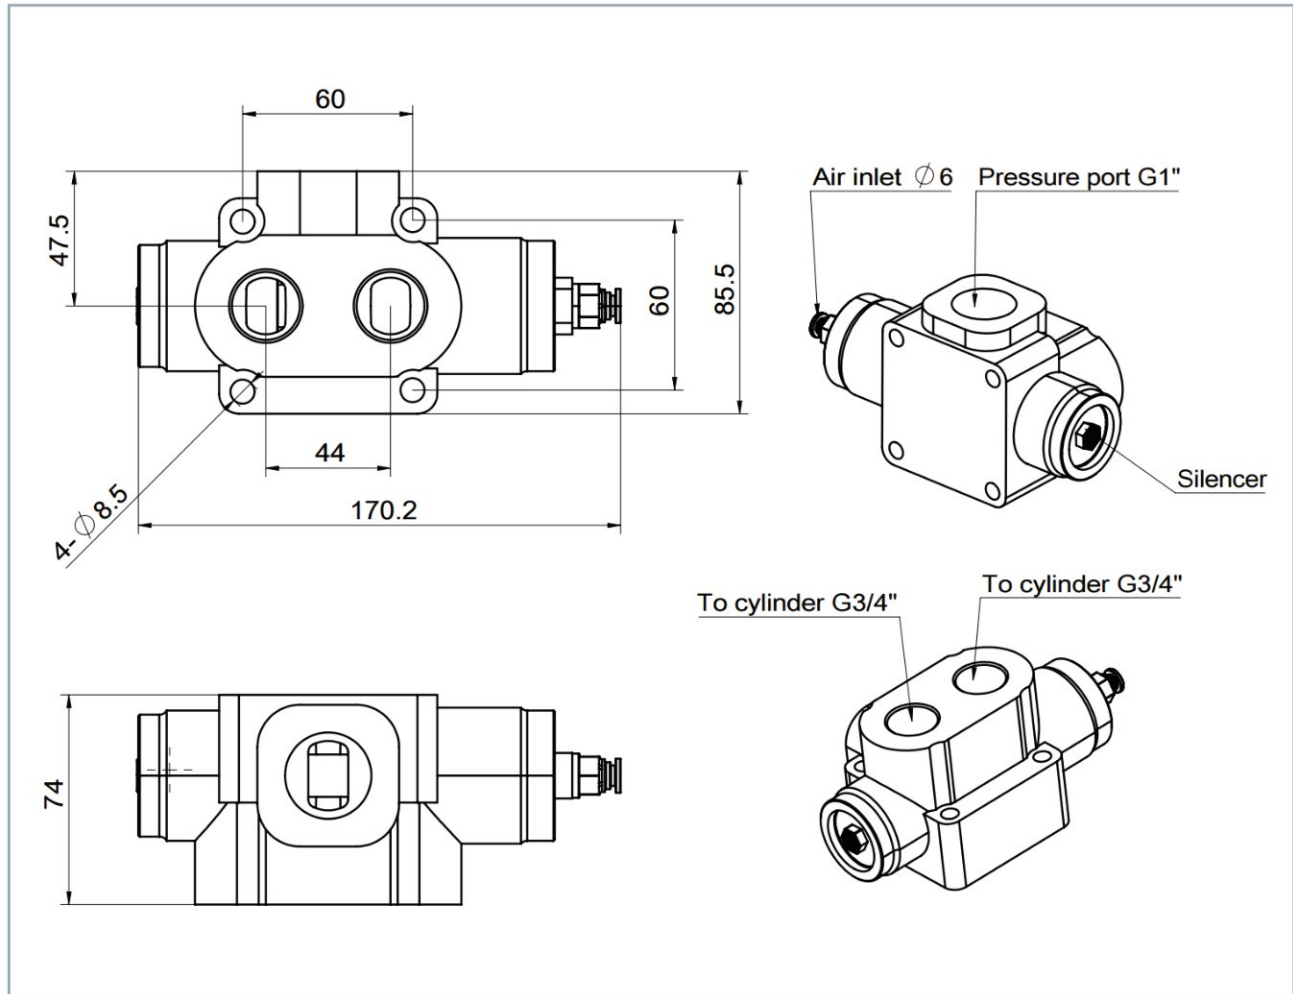

Type	P/N	Pressure port	To Cylinder	To Cylinder	Weight(Kg)
DV150	8041502502301	G1"	G3/4"	G3/4"	3

ITALY

41012 CARPI (MO)

VIA MELONI DI QUARTIROLO, 8

VAT NR. 04226670364