





# TP150 Tipping Valve

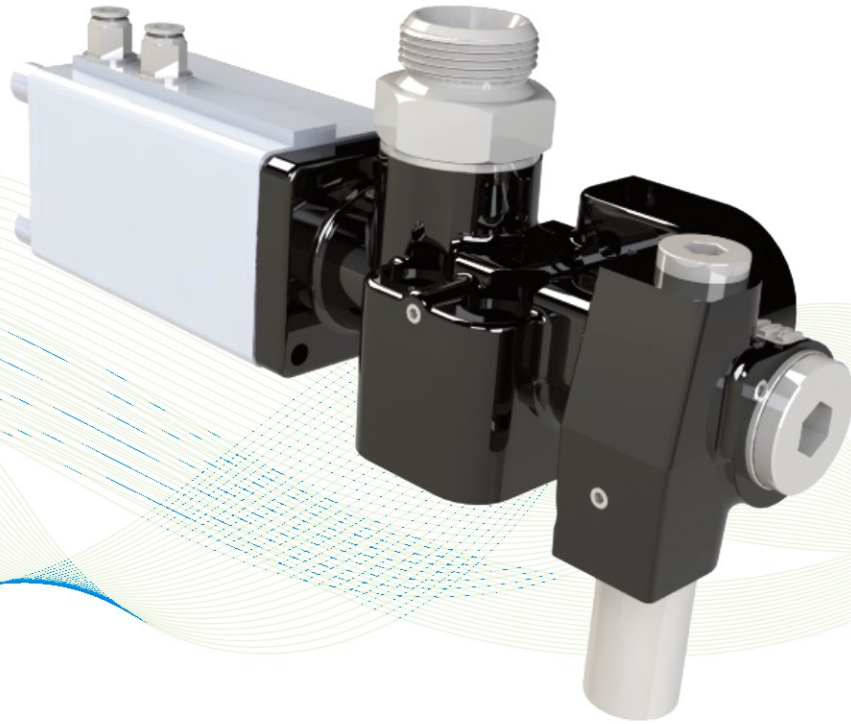


## TECHNICAL DATA

|                       |             |                         |                  |
|-----------------------|-------------|-------------------------|------------------|
| Flow                  | 150L/min    | Optimal viscosity range | 12-100cSt        |
| Max. working pressure | 250bar      | Oil filtering           | 25µm             |
| Max. peak pressure    | 270bar      | Air pressure            | 6-12bar          |
| Oil temperature       | -20°C—+80°C | Mounting position       | Tank or Cylinder |

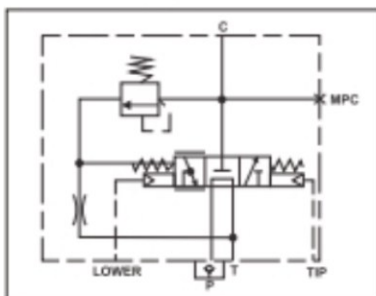

Cast-iron body and nickel plating spool  
Built-in check and adjustable relief valve  
Pressure switch mounting option

## DIMENSIONS(mm)

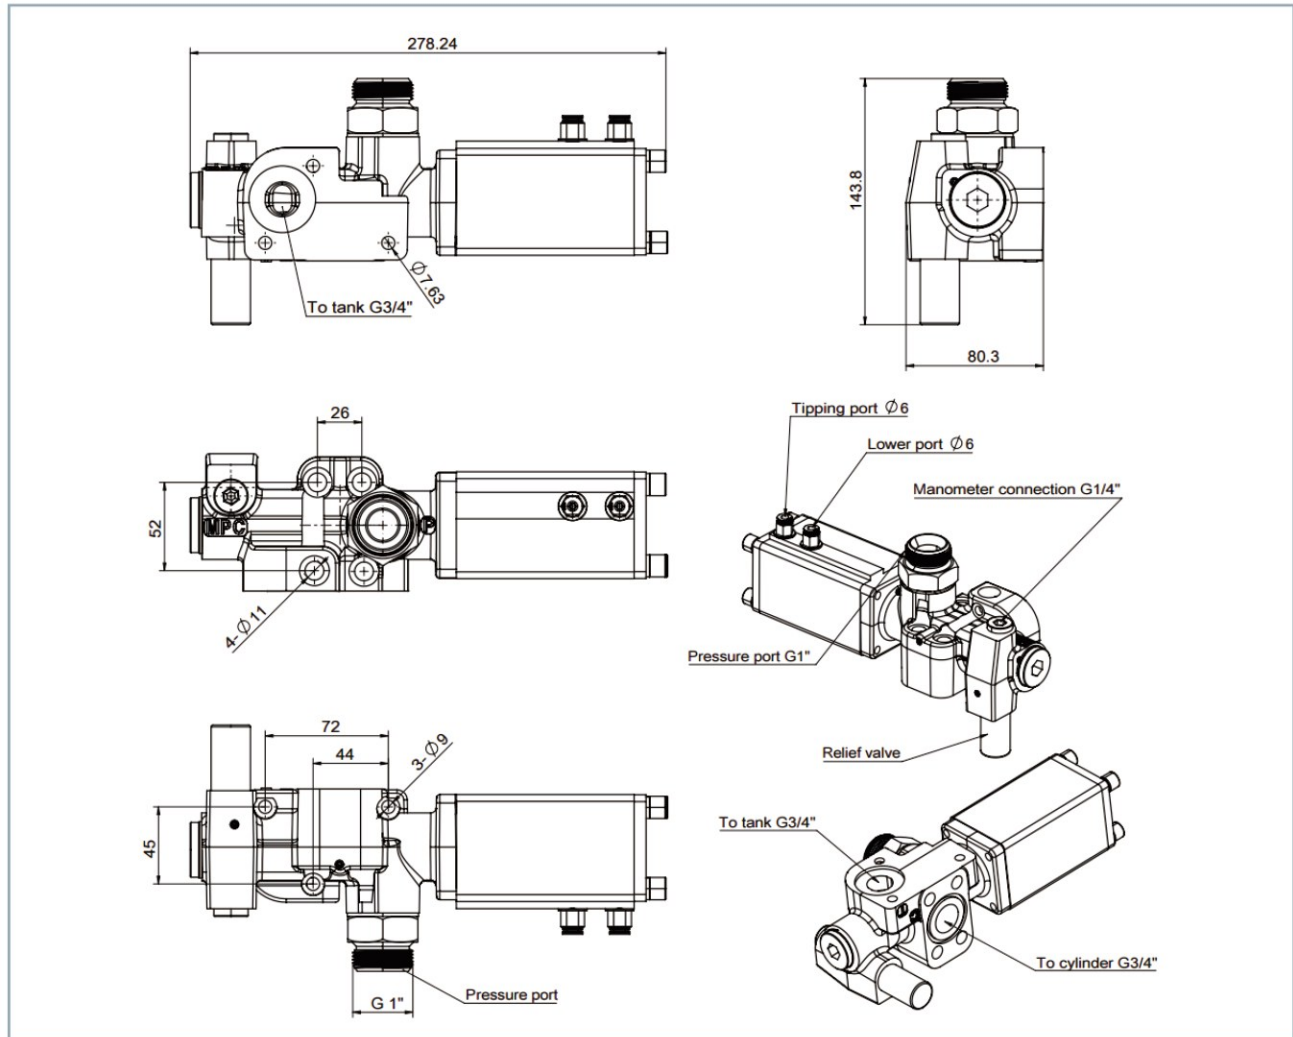

| Type  | P/N           | Pressure port | To Cylinder | To Tank | Weight(Kg) |
|-------|---------------|---------------|-------------|---------|------------|
| TP150 | 8041502502300 | G1"           | G3/4"       | G3/4"   | 5.4        |

ITALY

41012 CARPI (MO)

VIA MELONI DI QUARTIROLO, 8

VAT NR. 04226670364