





TP220T Tipping Valve

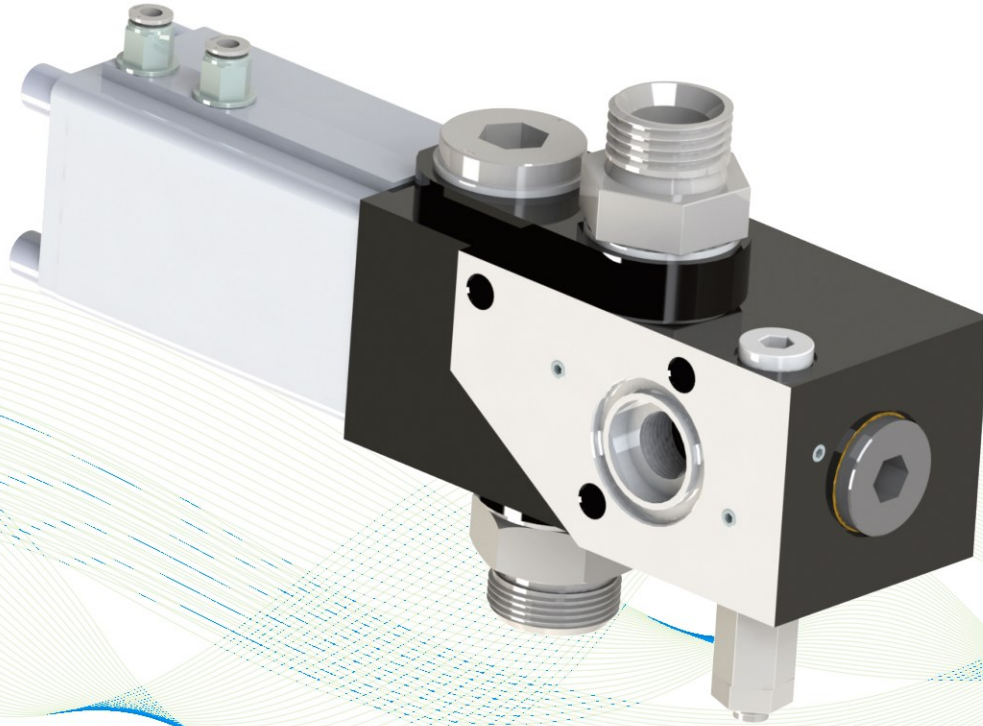


TECHNICAL DATA

Flow	220L/min	Optimal viscosity range	12-100cSt
Max. working pressure	250bar	Oil filtering	25µm
Max. peak pressure	270bar	Air pressure	6-12bar
Oil temperature	-20°C—+80°C	Mounting position	Tank or Chassis

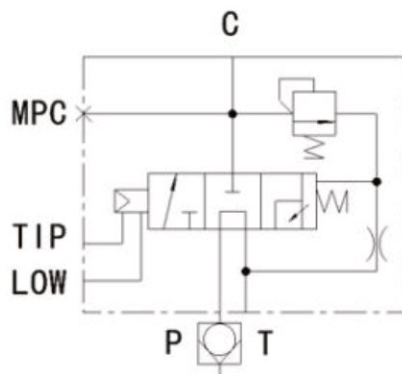

Cast-iron body and nickel plating spool
Built-in check and adjustable relief valve
Pressure switch mounting option

DIMENSIONS(mm)

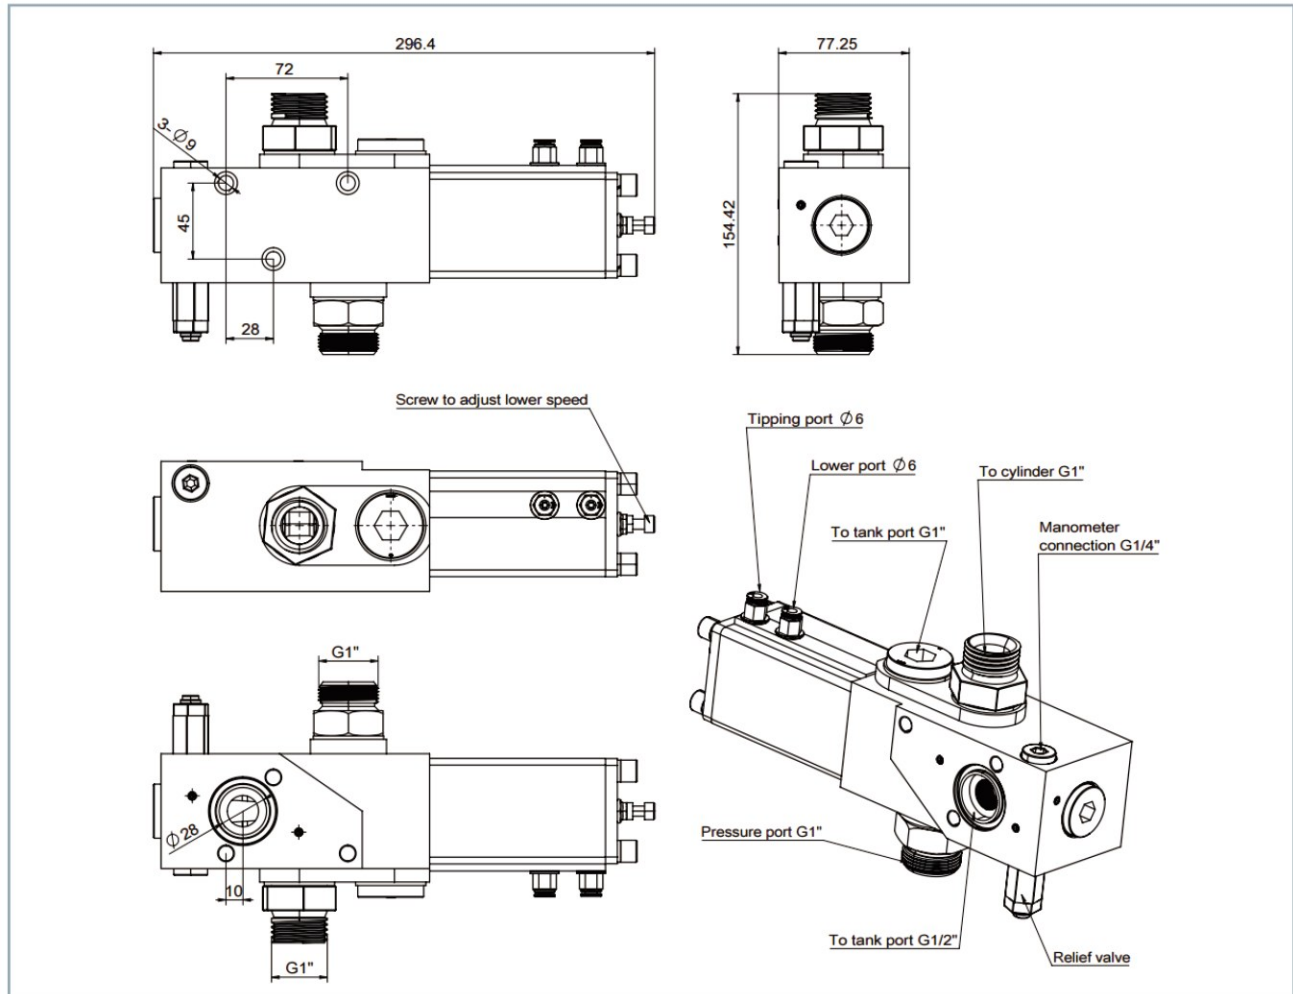

Type	P/N	Pressure port	To Cylinder	To Cylinder	Weight(Kg)
TP220T	8042202502301	G1"	G1"	G1"	6.7

ITALY

41012 CARPI (MO)

VIA MELONI DI QUARTIROLO, 8

VAT NR. 04226670364