





TP320T Tipping Valve

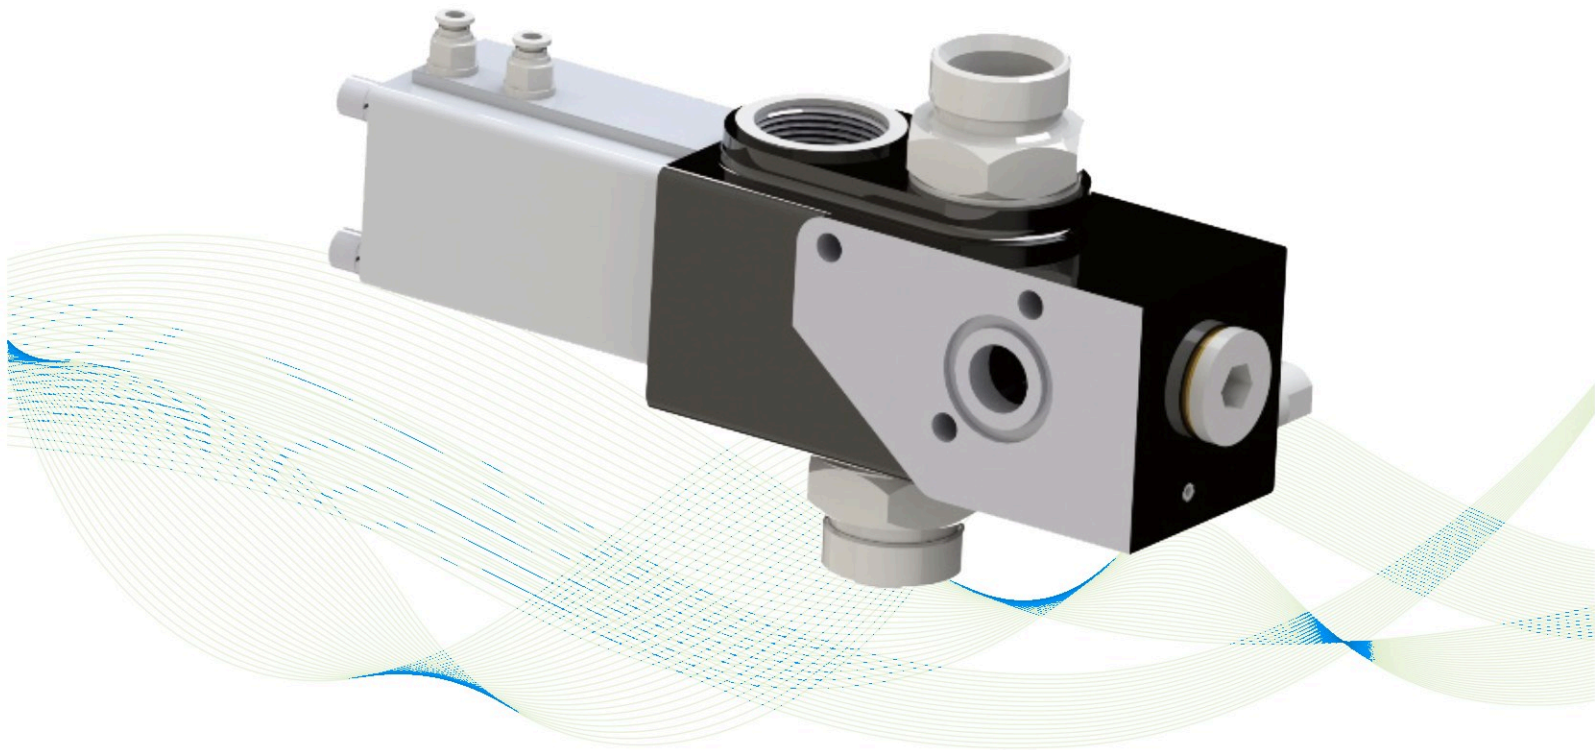


TECHNICAL DATA

Flow	320L/min	Optimal viscosity range	12-100cSt
Max. working pressure	250bar	Oil filtering	25µm
Max. peak pressure	270bar	Air pressure	6-12bar
Oil temperature	-20°C—+80°C	Mounting position	Tank

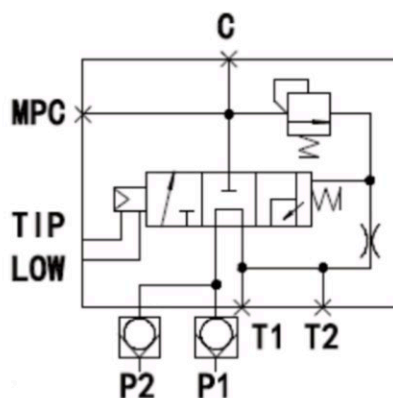

Cast-iron body and nickel plating spool
Built-in check and adjustable relief valve
Pressure switch mounting option

DIMENSIONS(mm)

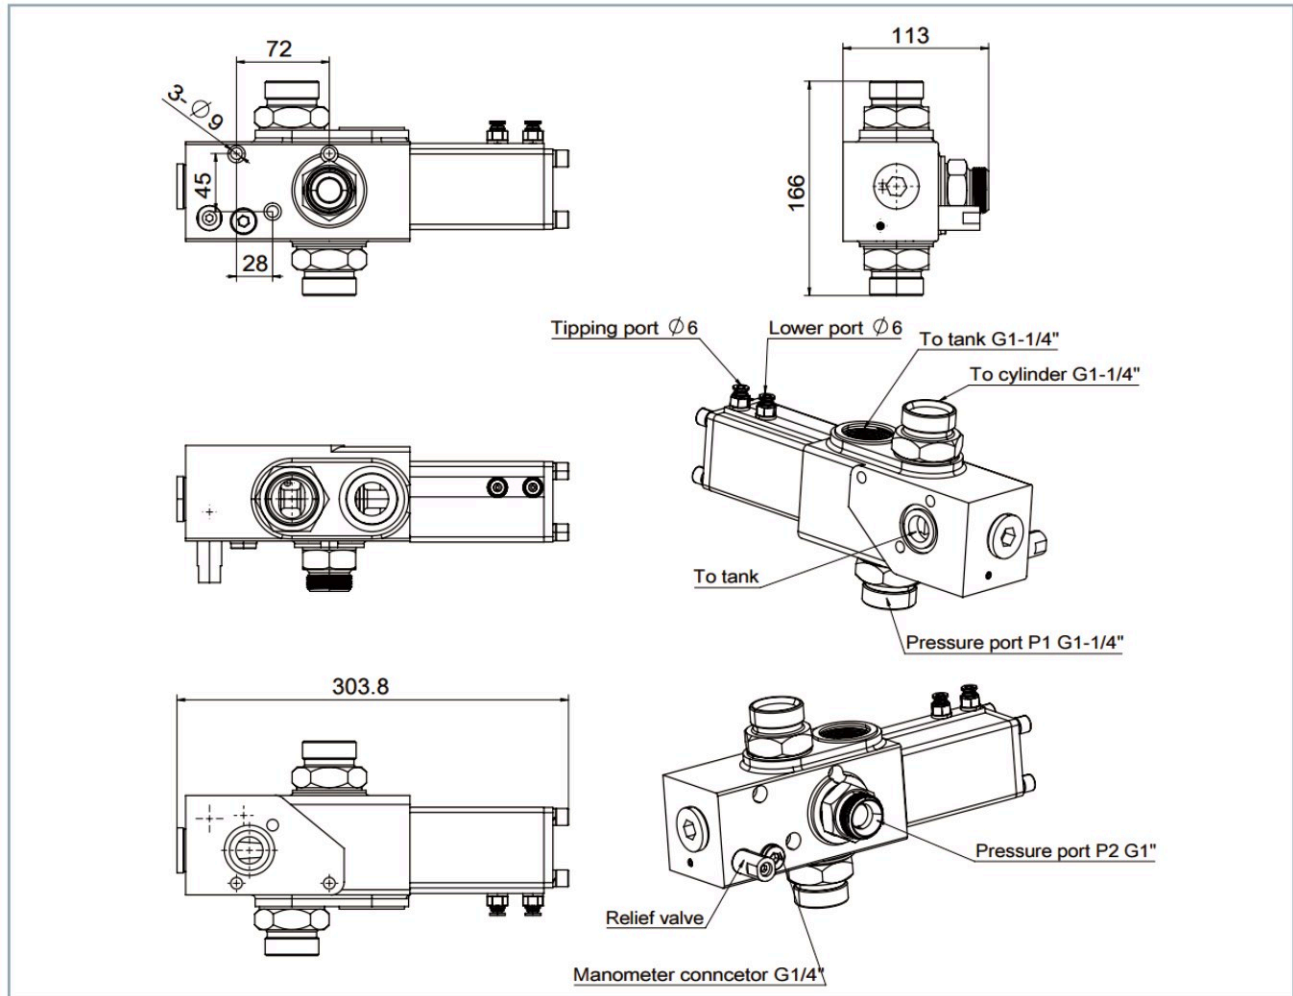

Type	P/N	Pressure port P1	Pressure port P2	To Cylinder	To Tank	Weight(Kg)
TP320T	8043202502300	G1-1/4"	G1"	G1-1/4"	G1-1/4"	8.8

ITALY

41012 CARPI (MO)

VIA MELONI DI QUARTIROLO, 8

VAT NR. 04226670364