





TP40 Tipping Valve

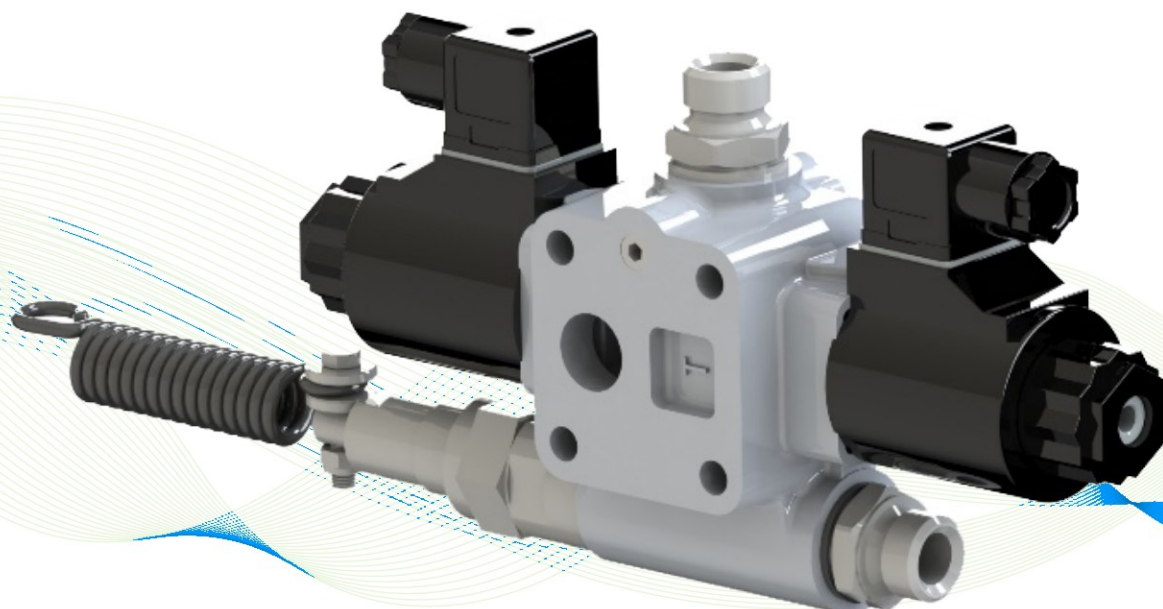


TECHNICAL DATA

Flow	40L/min	Optimal viscosity range	12-100cSt
Max. working pressure	190bar	Oil filtering	25µm
Max. peak pressure	200bar	Voltage of coils	12V or 24V
Oil temperature	-15°C—+110°C	Mounting position	Tank or Chassis

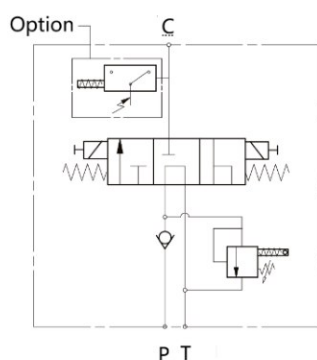

- Cast-iron body and nickel plating spool
- Built-in check and adjustable relief valve
- Pressure switch mounting option
- Integrated with mechanical end-of-stroke valve

DIMENSIONS(mm)

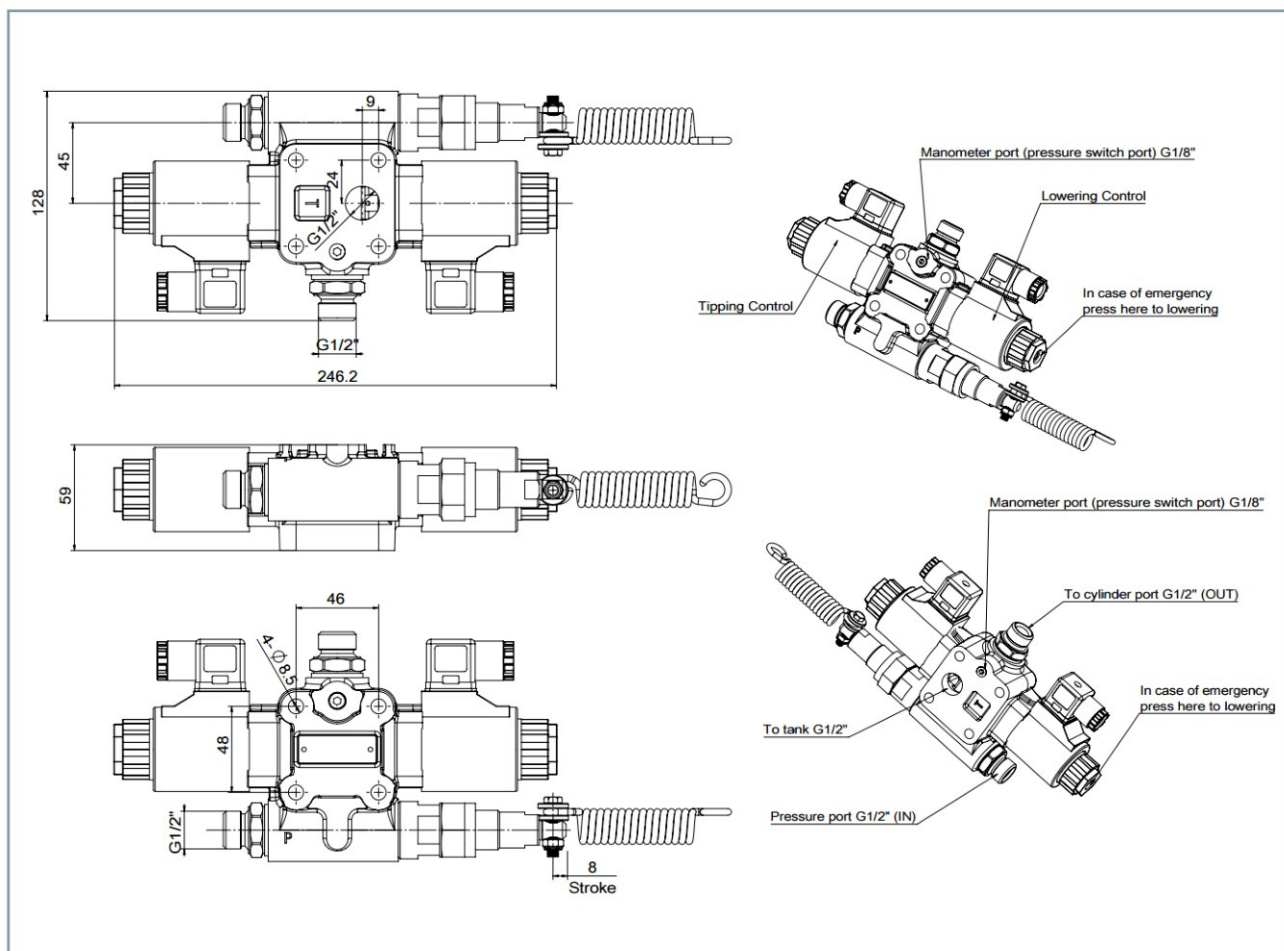

Type	P/N	Pressure port	To Cylinder	To Tank	Weight(Kg)
TP40-12V	8040401901100	G1/2"	G1/2"	G1/2"	3.85
TP40-24V	8040401901200				

ITALY

41012 CARPI (MO)

VIA MELONI DI QUARTIROLO, 8

VAT NR. 04226670364