




## UBC Series Underbody Cylinders

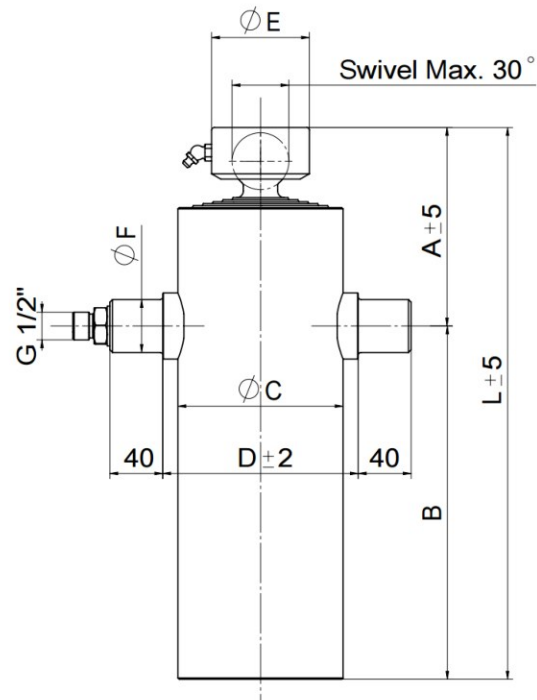

L & A dimensions are not including 20mm pull out

### FEATURES :

- Compact design with high performance and safety characteristics

- Chromed stages and piston rod

- Design with sphere enables more swivel angle

## UBC 090:

| P/N           | Type           | Extension | Pressure (bar) | Tipping weight (ton) | Weight (kg) | Volume (l) | L (mm) | A (mm) | B (mm) | ΦC (mm) | D (mm) | ΦE (mm) | ΦF (mm) |
|---------------|----------------|-----------|----------------|----------------------|-------------|------------|--------|--------|--------|---------|--------|---------|---------|
| U090030850200 | UBC 3-090-0850 | 3         | 200            | 5-14                 | 26          | 3.8        | 445    | 156    | 289    | 110     | 148    | 74      | 40      |
| U090031200200 | UBC 3-090-1200 | 3         | 200            | 5-14                 | 35          | 5.4        | 578    | 180    | 398    | 110     | 148    | 92      | 40      |
| U090040680200 | UBC 4-090-0680 | 4         | 200            | 5-11                 | 19          | 2.5        | 328    | 152    | 176    | 110     | 148    | 74      | 40      |
| U090040820200 | UBC 4-090-0820 | 4         | 200            | 5-11                 | 20          | 3.1        | 363    | 155    | 208    | 110     | 148    | 74      | 40      |
| U090040985200 | UBC 4-090-0985 | 4         | 200            | 5-11                 | 23          | 3.7        | 405    | 155    | 250    | 110     | 148    | 74      | 40      |
| U090041140200 | UBC 4-090-1140 | 4         | 200            | 5-11                 | 25          | 4.3        | 445    | 156    | 289    | 110     | 148    | 74      | 40      |
| U090051250200 | UBC 5-090-1250 | 5         | 200            | 4-8                  | 25          | 4          | 405    | 155    | 250    | 110     | 148    | 74      | 40      |

## UBC 105:


| P/N           | Type           | Extension | Pressure (bar) | Tipping weight (ton) | Weight (kg) | Volume (l) | L (mm) | A (mm) | B (mm) | ΦC (mm) | D (mm) | ΦE (mm) | ΦF (mm) |
|---------------|----------------|-----------|----------------|----------------------|-------------|------------|--------|--------|--------|---------|--------|---------|---------|
| U105030855200 | UBC 3-105-0855 | 3         | 200            | 10-18                | 35          | 5.6        | 461    | 167    | 294    | 125     | 148    | 92      | 40      |
| U105040820200 | UBC 4-105-0820 | 4         | 200            | 8-15                 | 22          | 4.6        | 363    | 150    | 213    | 125     | 148    | 74      | 40      |
| U105040985200 | UBC 4-105-0985 | 4         | 200            | 8-15                 | 27          | 5.5        | 405    | 150    | 255    | 125     | 148    | 74      | 40      |
| U105041140200 | UBC 4-105-1140 | 4         | 200            | 8-15                 | 33          | 6.4        | 461    | 167    | 294    | 125     | 148    | 92      | 40      |
| U105041495200 | UBC 4-105-1495 | 4         | 200            | 8-15                 | 40          | 8.3        | 549    | 157    | 392    | 125     | 148    | 92      | 40      |
| U105051030200 | UBC 5-105-1030 | 5         | 200            | 6-12                 | 24          | 4.9        | 363    | 150    | 213    | 125     | 148    | 74      | 40      |
| U105051240200 | UBC 5-105-1240 | 5         | 200            | 6-12                 | 28          | 5.9        | 405    | 150    | 255    | 125     | 148    | 74      | 40      |
| U105051435200 | UBC 5-105-1435 | 5         | 200            | 6-12                 | 30          | 6.8        | 444    | 150    | 294    | 125     | 148    | 74      | 40      |
| U105051875200 | UBC 5-105-1875 | 5         | 200            | 6-12                 | 38          | 8.9        | 532    | 140    | 392    | 125     | 148    | 74      | 40      |
| U105061005200 | UBC 6-105-1005 | 6         | 200            | 5-9                  | 21          | 4.1        | 323    | 151    | 172    | 125     | 148    | 74      | 40      |
| U105061175200 | UBC 6-105-1175 | 6         | 200            | 5-9                  | 22          | 4.7        | 351    | 151    | 200    | 125     | 148    | 74      | 40      |

## UBC 120:

| P/N           | Type           | Extension | Pressure (bar) | Tipping weight (ton) | Weight (kg) | Volume (l) | L (mm) | A (mm) | B (mm) | ΦC (mm) | D (mm) | ΦE (mm) | ΦF (mm) |
|---------------|----------------|-----------|----------------|----------------------|-------------|------------|--------|--------|--------|---------|--------|---------|---------|
| U120030895200 | UBC 3-120-0895 | 3         | 200            | 13-24                | 38          | 7.9        | 480    | 197    | 283    | 145     | 165    | 92      | 45      |
| U120041145200 | UBC 4-120-1145 | 4         | 200            | 11-21                | 46          | 8.8        | 470    | 197    | 273    | 145     | 165    | 92      | 45      |
| U120041365200 | UBC 4-120-1365 | 4         | 200            | 11-21                | 51          | 10.6       | 525    | 232    | 293    | 145     | 165    | 92      | 45      |
| U120041500200 | UBC 4-120-1500 | 4         | 200            | 11-21                | 55          | 11.6       | 558    | 160    | 398    | 145     | 165    | 92      | 45      |
| U120051025200 | UBC 5-120-1025 | 5         | 200            | 9-17                 | 35          | 7          | 389    | 197    | 192    | 145     | 165    | 92      | 45      |
| U120051170200 | UBC 5-120-1170 | 5         | 200            | 9-17                 | 39          | 7.9        | 418    | 197    | 221    | 145     | 165    | 92      | 45      |
| U120051430200 | UBC 5-120-1430 | 5         | 200            | 9-17                 | 44          | 9.7        | 470    | 197    | 273    | 145     | 165    | 92      | 45      |
| U120051705200 | UBC 5-120-1705 | 5         | 200            | 9-17                 | 50          | 11.5       | 525    | 232    | 293    | 145     | 165    | 92      | 45      |
| U120051870200 | UBC 5-120-1870 | 5         | 200            | 9-17                 | 55          | 12.6       | 558    | 160    | 398    | 145     | 165    | 92      | 45      |
| U120061240200 | UBC 6-120-1240 | 6         | 200            | 7-14                 | 37          | 7.3        | 372    | 180    | 192    | 145     | 165    | 74      | 45      |
| U120061410200 | UBC 6-120-1410 | 6         | 200            | 7-14                 | 36          | 8.3        | 401    | 180    | 221    | 145     | 165    | 74      | 45      |
| U120061725200 | UBC 6-120-1725 | 6         | 200            | 7-14                 | 42          | 10.2       | 453    | 180    | 273    | 145     | 165    | 74      | 45      |
| U120062055200 | UBC 6-120-2055 | 6         | 200            | 7-14                 | 47          | 12.1       | 508    | 215    | 293    | 145     | 165    | 74      | 45      |
| U120062250200 | UBC 6-120-2250 | 6         | 200            | 7-14                 | 50          | 13.2       | 541    | 143    | 398    | 145     | 165    | 74      | 45      |


## CRADLE:

| Part Number   | Description | Cylinder Type |
|---------------|-------------|---------------|
| 9000001240001 | Cradle D40  | UBC090        |
|               |             | UBC105        |

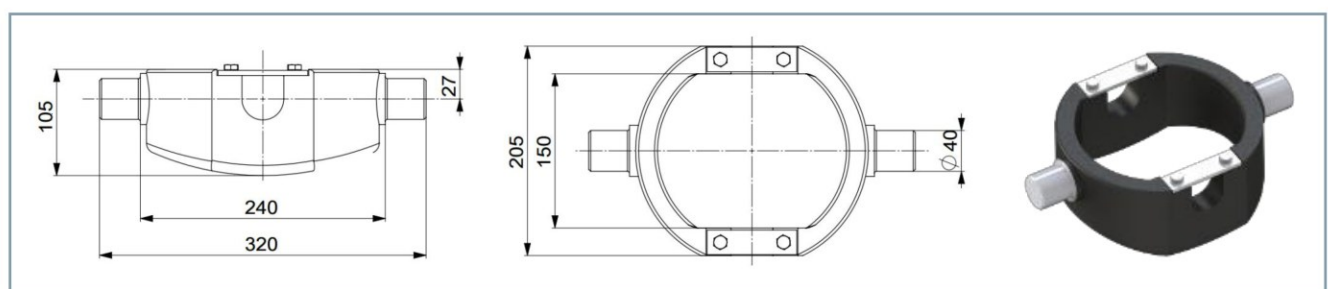


## CRADLE:

| Part Number   | Description | Cylinder Type |
|---------------|-------------|---------------|
| 9000001245001 | Cradle D45  | UBC120        |

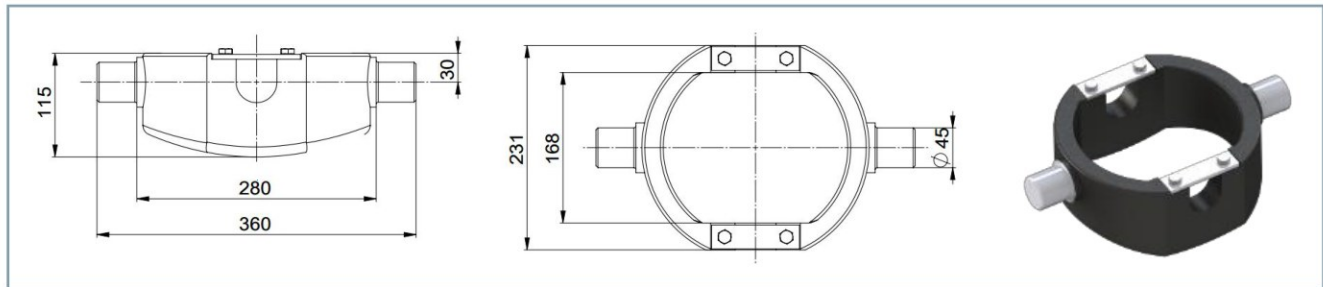


## CRADLE SUPPORT:

| Part Number   | Description        | Cylinder Type |
|---------------|--------------------|---------------|
| 9000001240002 | Cradle Support D40 | UBC 090       |
|               |                    | UBC 105       |

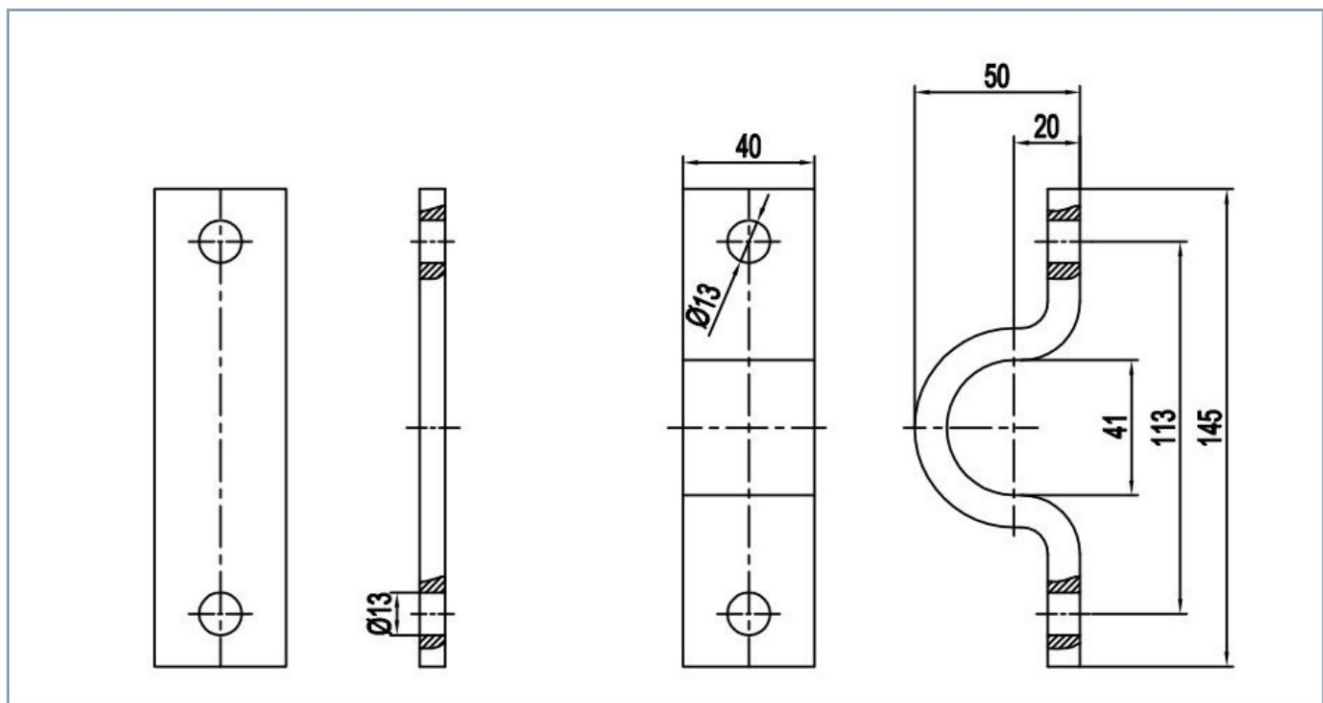

## CRADLE SUPPORT:

| Part Number   | Description        | Cylinder Type |
|---------------|--------------------|---------------|
| 9000001245002 | Cradle Support D45 | UBC 120       |

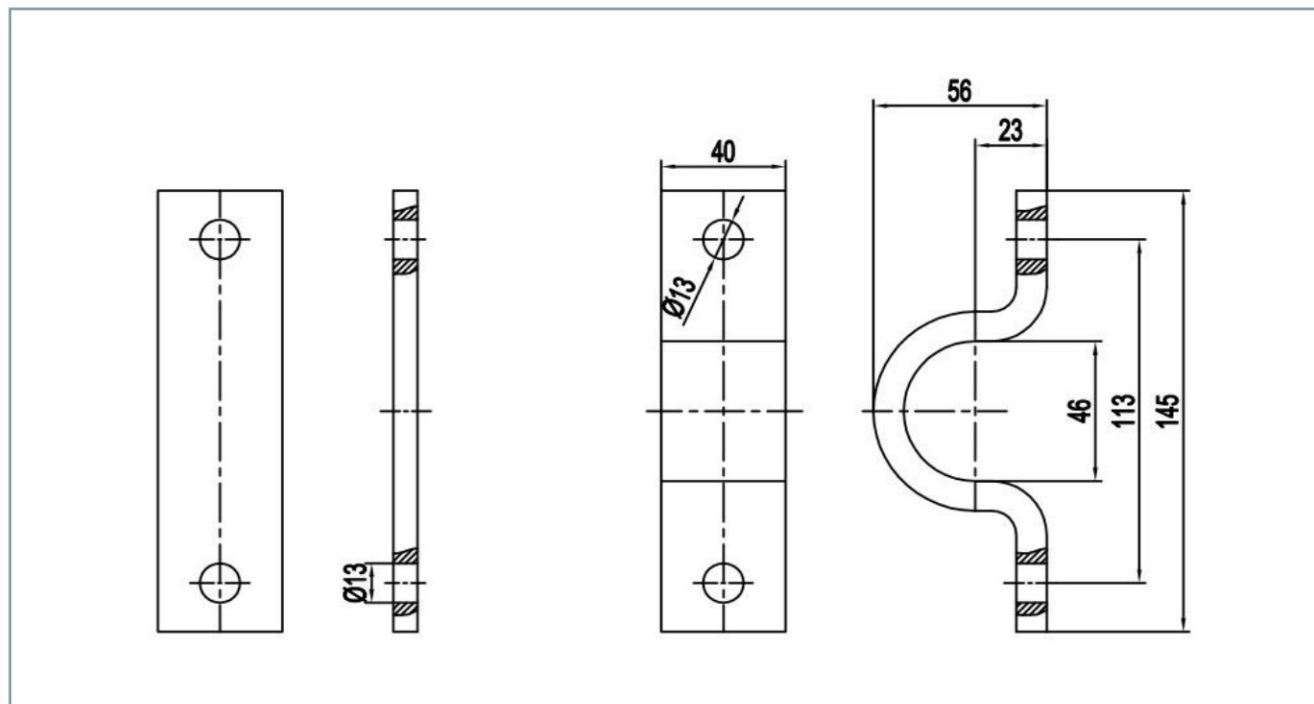

ITALY

41012 CARPI (MO)

VIA MELONI DI QUARTIROLO, 8

VAT NR. 04226670364